



MS-98F5


Mini-ITX with Intel® Atom™ Bay Trail for Low-Power, Slim/Low-Profile & Fanless Solution

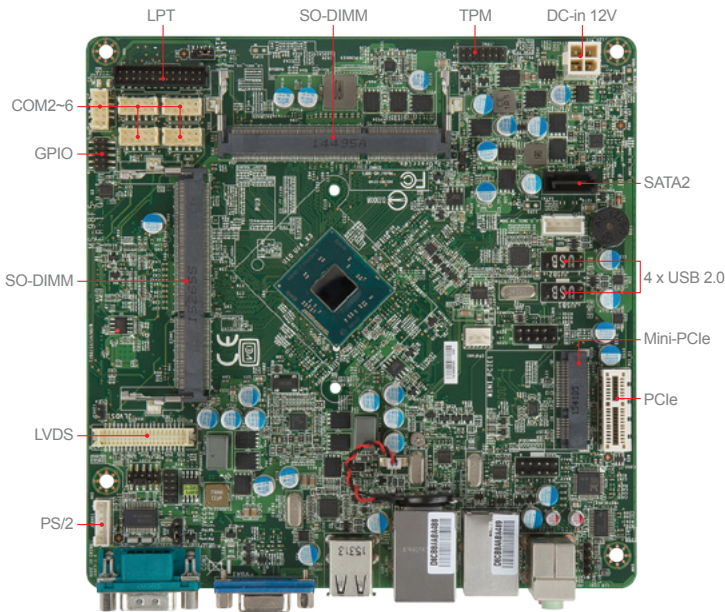

919-98F5-101(low profile)

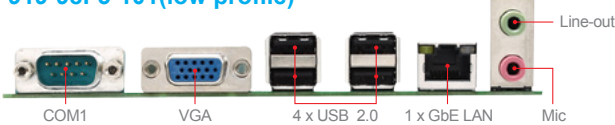

919-98F5-103(low profile)

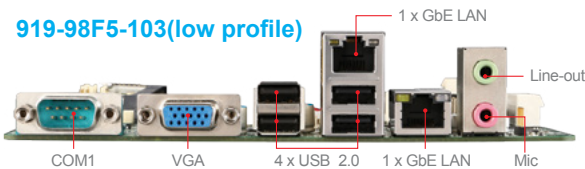

Features

- Intel® Bay Trail Series SoC
- 2 DDR3L 1333/1066 MHz SODIMM slots up to 8GB
- Dual independent displays: VGA, LVDS
- 2 GbE LAN with RJ-45(1 by option)
- 1 PCI x1 (Gen2), 1 Mini-PCle (Full size, with mSATA) slots
- mSATA, SATA 2.0 for storage
- 8 USB 2.0, 6 COM, GPIO, LPT, PS/2, Audio
- DC-IN 12V

Ordering Information

Part Number	Description
919-98F5-101	MS-98F5/MS-98F5/609-98F5-010/809-98F5-102/MS-98F5 VER 10 OPT A FOR MS-98F5 STD SKU, 1 LAN, 1 SO-DIMM BULK
919-98F5-103	MS-98F5/MS-98F5/609-98F5-020/809-98F5-101/MS-98F5 VER 10 OPT B FOR MS-98F5 STD SKU, 2 LAN, 2 SO-DIMM BULK

Packing List

Part Number	Description
E21-98F5010-C22	I/O Shield (2 x LAN)
E21-98F5020-C22	I/O Shield (1 x LAN)
G71-SEDC117-X03	Driver CD
K10-3004215-V03	DC power cable, 160mm
K1D-1012064-V03	SATA cable, 200mm

Specifications

Processor	CPU	Intel® Celeron® Processor J1900, QC, 10W Intel® Celeron® Processor N2930, QC, 7.5W
	Frequency	J1900, 2.0 GHz, up to 2.42 GHz N2930, 1.83 GHz, up to 2.16 GHz
	L2 Cache	2 MB
	CPU Type	BGA
	Chipset	Integrated
Memory	BIOS	AMI
	Technology	Dual-channel DDR3L 1333/1066 MHz
	Max. Capacity	Up to 8GB
	Socket	2 or 1 x 204-pin SO-DIMMs (depends on SKU)
Display	Controller	Intel® HD Graphics
	Graphic Memory	Depends on CPU
	LVDS	Dual Channel 24-bit (add chrontel 7511B chipset)
	VGA	1
	Multiple Display	2 independent displays
Ethernet	Display Interface	VGA up to 2560 x 1600 @60Hz LVDS up to 1920 x 1200 @60Hz
	Controller	2 or 1 x Realtek® RTL8111G-CG GbE LAN (depends on SKU)
Audio	Controller	Realtek® ALC887 HD Audio Codec
Super I/O	Controller	Fintek F81866AD-I
H/W Monitor	Watchdog Timer	256-level Watchdog Timer
	Smart Fan	Yes
TPM	Controller	Pin header
I/O Interface	USB	8 x USB 2.0 (4 x internal, 4 x rear)
	Serial	6 x COM ports (COM1: rear, COM2-6: internal) COM1: RS-232, 0V/5V/12V COM2-6: RS-232, w/o power
	Parallel	1 (Pin header)
	PS/2	1 (Pin header)
	GPIO	8-bits (4 x GPI, 4 x GPO), 3.3V
	Expansion Slot	PCIe x1
Storage	M.2	N/A
	Mini-PCle	1 x Full-size (w/ mSATA)
	SATA	1 x SATA 2.0
Power Supply	mSATA	1
	DC	DC-in 12V
Environment	ATX	N/A
	Operating Temperature	0 ~ 60°C
	Operating Humidity	10 ~ 90%, non-condensing
	Storage Temperature	-20 ~ 80°C
Form Factor	Storage Humidity	10 ~ 90%, non-condensing
	Dimensions	170 x 170mm (Mini-ITX)
	Weight	0.37 kg
Certification	EMC	FCC, CE, RCM, VCCI, BSMI
Software Platform	OS Support	Windows 7 (32/64-bit) Windows 8 (32/64-bit) Windows 10 (64-bit)

Optional Item

Part Number	Description
K14-1018003-V03	COM port cable, 300mm
K1B-3008012-E06	USB 2.0 cable, 330mm